





**适用范围:**

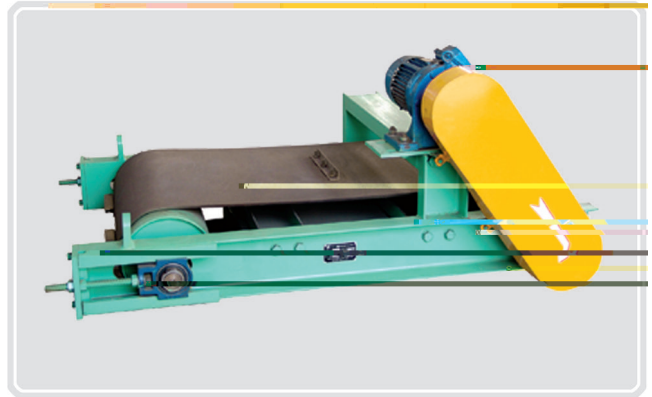

**技术特点:**

C 70% 86%

C 75%

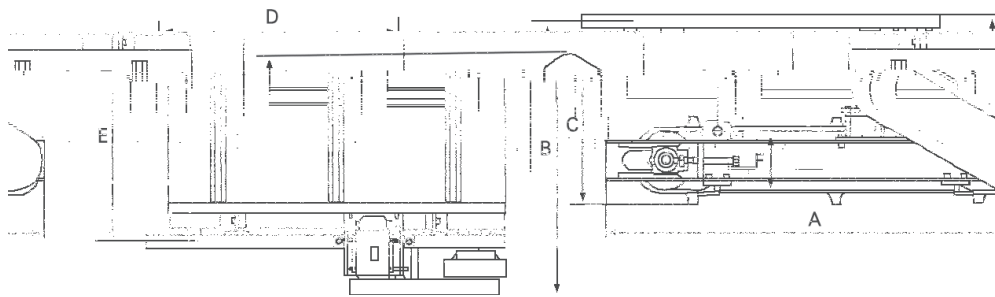

	mm	mm	mT	m/ s	kg	kw	mm						kg
							A	B	C	D	E	F	
RCY- Q40	400	100	40	2.0	Q 1- 5	0.75	1270	840	540	1050	580	270	380
RCY- Q50	500	150	50	2.5		0.75	1322	1006	615	622	672	270	490
RCY- Q65	650	200	50	2.5		1.1	1545	1150	710	1300	830	270	640
RCY- Q80	800	250	60	3.15	Q 1- 10	1.5	1712	1385	735	972	1022	270	850
RCY- Q100	1000	300	60	4.0		2.2	1915	1535	735	1500	1298	270	1300
RCY- Q120	1200	350	60	4.0		2.2	2115	1540	790	1780	1298	270	1650

( )

